



PWS10C – AC Power Supply Module

1/26/2014



| Specifications | |
|----------------------------------|---|
| Input Voltage | 110/240 VAC, 50/60 Hz, Single Phase |
| Input Voltage Range | Autoranging 85-264 VAC |
| Maximum Operation Current | 0.5 A at 110-240 VAC. Fuse rating 2 A SloBlow |
| Input frequency | 50 ~ 60 Hz |
| DC output voltage | 5 V |
| Output voltage tolerance | 2% |
| Output rated current | 4.5 A |
| Output current range | 0.1 A ~ 4.7 A |
| Ripple & Noise (p-p) | 100 mV |
| DC output power | 22.5 W |
| Efficiency | 74% |
| Over voltage protection | 5.75 ~ 6.2 V |
| Fuse rating | 2 A |
| Output protection | When shorted, shutdown |
| External connections | 20-pt. terminal block connector, max. wire size #14 AWG |
| Weight | 440 g |

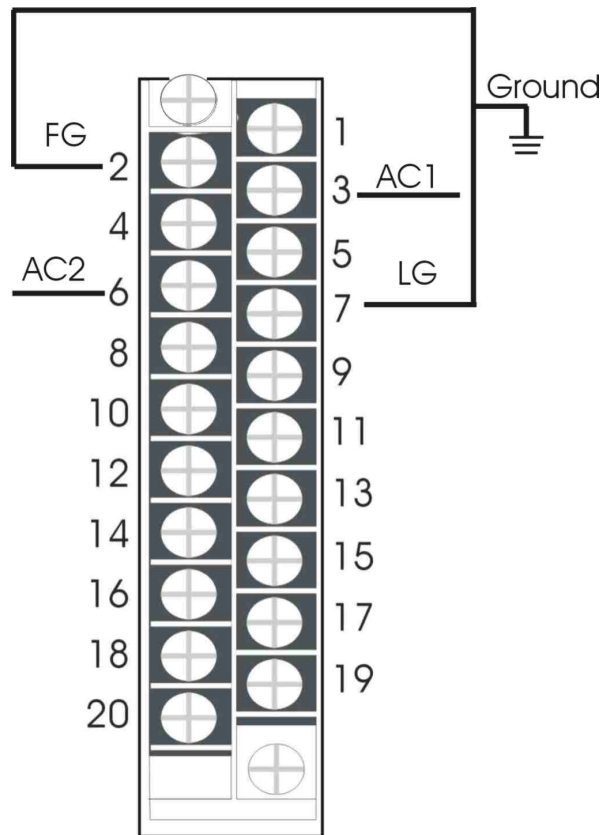

 No 24 VDC output voltage is available for powering I/O devices

