



PWS10C – AC Power Supply Module

1/26/2014



Specifications	
Input Voltage	110/240 VAC, 50/60 Hz, Single Phase
Input Voltage Range	Autoranging 85-264 VAC
Maximum Operation Current	0.5 A at 110-240 VAC. Fuse rating 2 A SloBlow
Input frequency	50 ~ 60 Hz
DC output voltage	5 V
Output voltage tolerance	2%
Output rated current	4.5 A
Output current range	0.1 A ~ 4.7 A
Ripple & Noise (p-p)	100 mV
DC output power	22.5 W
Efficiency	74%
Over voltage protection	5.75 ~ 6.2 V
Fuse rating	2 A
Output protection	When shorted, shutdown
External connections	20-pt. terminal block connector, max. wire size #14 AWG
Weight	440 g

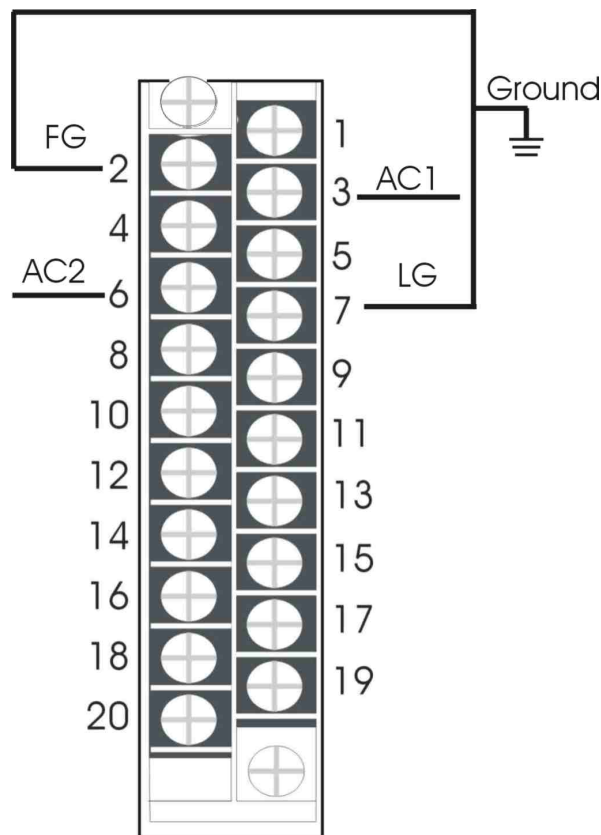

 No 24 VDC output voltage is available for powering I/O devices

