




Specifications	
Input voltage	110/240 VAC, 50/60 Hz, Single Phase
Input voltage range	Autoranging 85-264VAC
Maximum operation current	0.5 amps at 110-240VAC. Fuse rating 2 amps SloBlow
Input frequency	50 ~ 60 Hz
DC output voltage	5 V
Output voltage tolerance	2%
Output rated current	9A
Output current range	0.1A ~ 9A
Ripple & Noise (p-p)	100mV
AC input power	60W
DC output power	45W
Efficiency	74%
Over voltage protection	5.75 ~ 6.2 V
Fuse rating	2A
Output protection	When shorted, shutdown
External connections	20-pt. terminal block connector, max. wire size #14 AWG
Weight	440 g



Note: No 24 VDC output voltage is available for powering I/O devices

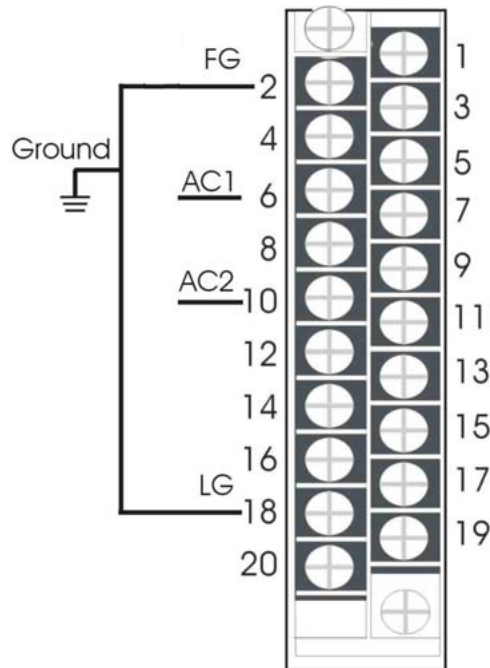