


SXAC10 – 16 point, 110 VAC Input

3/6/2019



		Specifications
Number of input points		16 points
Rated input voltage		100~120 VAC, 50~60 Hz
Rated input current		15 mA (110 VAC, 60 Hz)
Operating voltage range		85~132 VAC (50~60 Hz±%5)
Turn ON state		Higher than 80 VAC/9 mA
Turn OFF state		Lower than 30 VAC/2 mA
Input impedance		10KΩ (60 Hz)
Max. Simultaneous input points		100% simultaneous ON (at 110 VAC)
Response time	OFF→ON	20 ms or less
	ON→OFF	35 ms or less
Common terminal arrangement		8 points/common
Internal current consumption		Max.100 mA, (all points ON)
Operating indicator LED's		ON state is indicated
External connections		20pt. terminal block connector, max. wire size #14 AWG
Weight		285 g

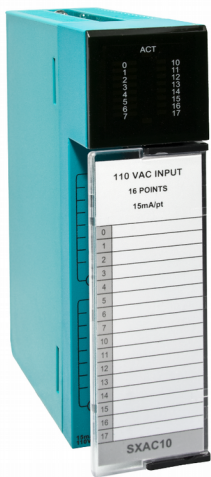